




## Quade Panel Light



300x300mm Ceiling Recessed

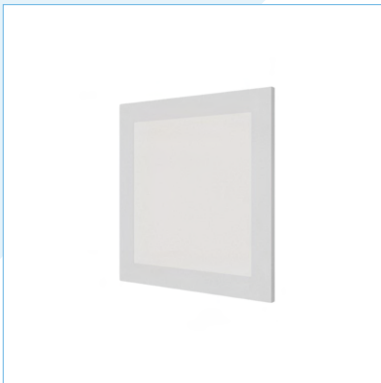

600x300mm Ceiling Recessed




600x600mm Ceiling Recessed



1200x300mm Ceiling Recessed



1200x600mm Ceiling Recessed

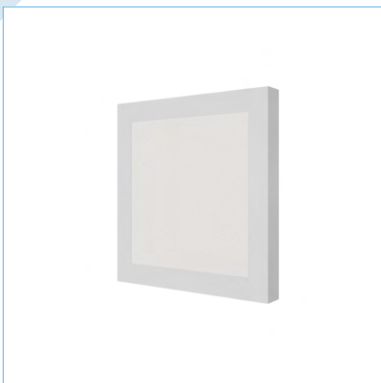

300x300mm Ceiling Mounted



600x300mm Ceiling Mounted



600x600mm Ceiling Mounted




1200x300mm Ceiling Mounted





1200x600mm Ceiling Mounted

# Quade Panel Light (300x300mm CR)

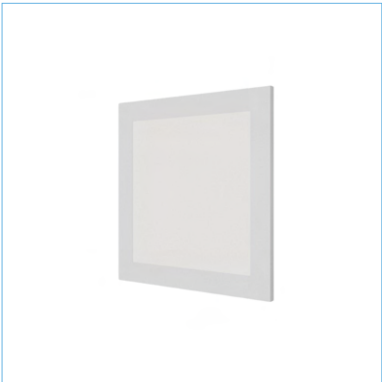

Transform your spaces with our sleek and energy-efficient Panel LED Light. Designed for modern interiors, this thin panel delivers uniform, glare-free illumination, making it perfect for offices, homes, and commercial environments.

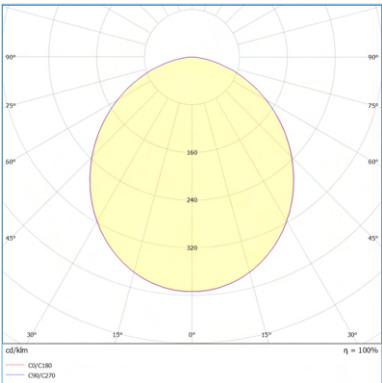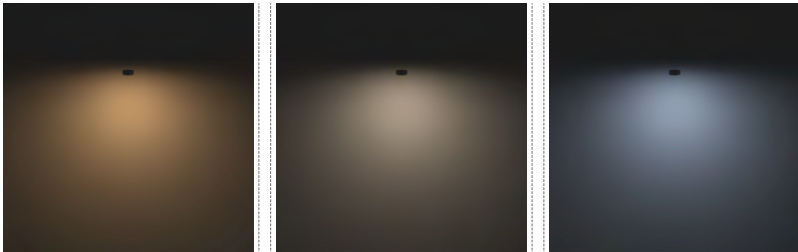

## General Information

Shape	Square
Mounting	Ceiling Recessed
Lighting Application	General Indoor, Living Rooms, Offices
Dimension	L 300mm W 300mm H 30mm
Housing Material	Aluminum + Iron
Housing Color	White
Ingress Protection	IP20

## Lamp Characteristics

Lamp Type	LED
Light Source	SMD
Luminous Flux	1600lm
Efficacy	100 lm/W
Color Temperature	3000K   4000K   6500K
Color Rendering Index	>80 Ra
Beam Angle	120°

## Electrical Information

Total Power	16W
Voltage	220V AC
Control Gear	On-Off

## Product Code





Brand (BR-)	Product (PRO)	Mounting (MO)	Dimension (DM)	Body Color (B)	IP Rating (IP)	Lumen (LUM)	CCT (CT)	Beam Angle (BA)	Control (C)
Zarelux (ZL-)	Quade Panel Light (QPL)	Ceiling Recessed (CR)	L 300mm (30)	White (W)	IP20 (20)	1600lm (160)	3000K (30) 4000K (40) 6500K (65)	120deg (12)	On-Off (O)



# Quade Panel Light (600x300mm CR)



Transform your spaces with our sleek and energy-efficient Panel LED Light. Designed for modern interiors, this thin panel delivers uniform, glare-free illumination, making it perfect for offices, homes, and commercial environments.

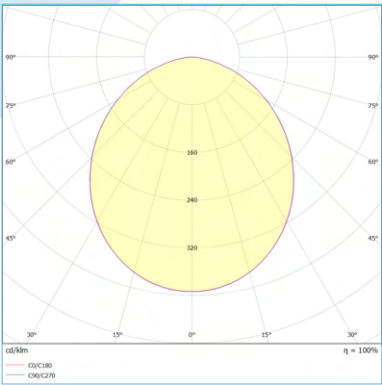

## General Information

Shape	Rectangular
Mounting	Ceiling Recessed
Lighting Application	General Indoor, Living Rooms, Offices
Dimension	L 600m W 300mm H 30mm
Housing Material	Aluminum + Iron
Housing Color	White
Ingress Protection	IP20

## Lamp Characteristics

Lamp Type	LED
Light Source	SMD
Luminous Flux	2800lm
Efficacy	100 lm/W
Color Temperature	3000K   4000K   6500K
Color Rendering Index	>80 Ra
Beam Angle	120°

## Electrical Information

Total Power	28W
Voltage	220V AC
Control Gear	On-Off



## Product Code

Brand (BR-)	Product (PRO)	Mounting (MO)	Dimension (DM)	Body Color (B)	IP Rating (IP)	Lumen (LUM)	CCT (CT)	Beam Angle (BA)	Control (C)
Zarelux (ZL-)	Quade Panel Light (QPL)	Ceiling Recessed (CR)	L 600mm (60)	White (W)	IP20 (20)	2800lm (280)	3000K (30) 4000K (40) 6500K (65)	120deg (12)	On-Off (O)

# Quade Panel Light (600x600mm CR)



Transform your spaces with our sleek and energy-efficient Panel LED Light. Designed for modern interiors, this thin panel delivers uniform, glare-free illumination, making it perfect for offices, homes, and commercial environments.

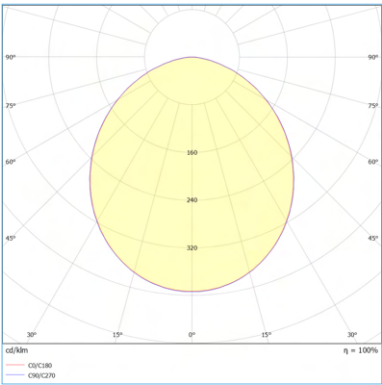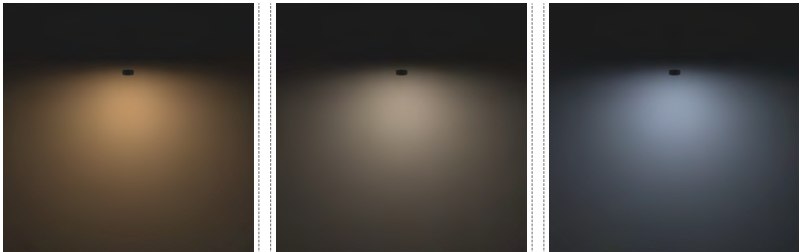

## General Information

Shape	Square
Mounting	Ceiling Recessed
Lighting Application	General Indoor, Living Rooms, Offices
Dimension	L 600mm W 600mm H 30mm
Housing Material	Aluminum + Iron
Housing Color	White
Ingress Protection	IP20

## Lamp Characteristics

Lamp Type	LED
Light Source	SMD
Luminous Flux	3600lm   4800lm   6000lm
Efficacy	100 lm/W
Color Temperature	3000K   4000K   6500K
Color Rendering Index	>80 Ra
Beam Angle	120°

## Electrical Information

Total Power	36W   48W   60W
Voltage	220V AC
Control Gear	On-Off

## Product Code





Brand (BR-)	Product (PRO)	Mounting (MO)	Dimension (DM)	Body Color (B)	IP Rating (IP)	Lumen (LUM)	CCT (CT)	Beam Angle (BA)	Control (C)
Zarelux (ZL-)	Quade Panel Light (QPL)	Ceiling Recessed (CR)	L 600mm (60)	White (W)	IP20 (20)	3600lm (360) 4800lm (480) 6000lm (600)	3000K (30) 4000K (40) 6500K (65)	120deg (12)	On-Off (O)



# Quade Panel Light (1200x300mm CR)



Transform your spaces with our sleek and energy-efficient Panel LED Light. Designed for modern interiors, this thin panel delivers uniform, glare-free illumination, making it perfect for offices, homes, and commercial environments.

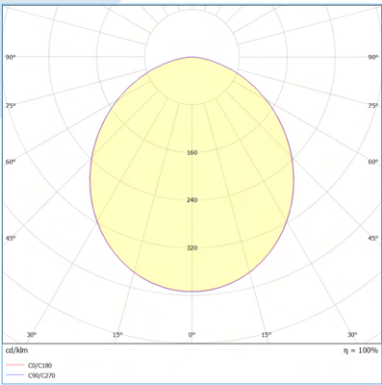

## General Information

Shape	Rectangular
Mounting	Ceiling Recessed
Lighting Application	General Indoor, Living Rooms, Offices
Dimension	L 1200m W 300mm H 30mm
Housing Material	Aluminum + Iron
Housing Color	White
Ingress Protection	IP20

## Lamp Characteristics

Lamp Type	LED
Light Source	SMD
Luminous Flux	3600lm   5000lm
Efficacy	100 lm/W
Color Temperature	3000K   4000K   6500K
Color Rendering Index	>80 Ra
Beam Angle	120°

## Electrical Information

Total Power	36W   50W
Voltage	220V AC
Control Gear	On-Off



## Product Code

Brand (BR-)	Product (PRO)	Mounting (MO)	Dimension (DM)	Body Color (B)	IP Rating (IP)	Lumen (LUM)	CCT (CT)	Beam Angle (BA)	Control (C)
Zarelux (ZL-)	Quade Panel Light (QPL)	Ceiling Recessed (CR)	L 1200mm (12)	White (W)	IP20 (20)	3600lm (360) 5000lm (500) 6500K (65)	3000K (30) 4000K (40) 6500K (65)	120deg (12)	On-Off (O)

# Quade Panel Light (1200x600mm CR)



Transform your spaces with our sleek and energy-efficient Panel LED Light. Designed for modern interiors, this thin panel delivers uniform, glare-free illumination, making it perfect for offices, homes, and commercial environments.

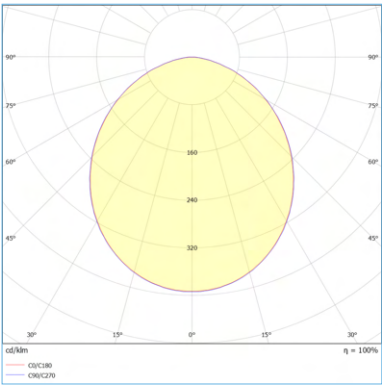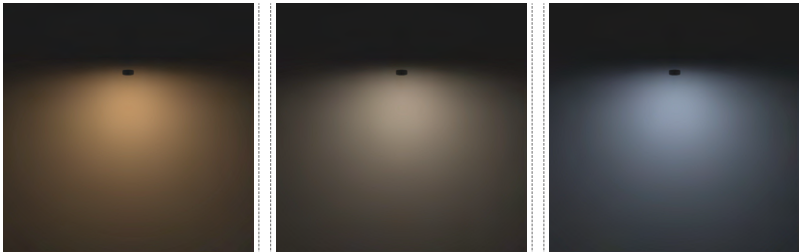

## General Information

Shape	Rectangular
Mounting	Ceiling Recessed
Lighting Application	General Indoor, Living Rooms, Offices
Dimension	L 1200m W 600mm H 30mm
Housing Material	Aluminum + Iron
Housing Color	White
Ingress Protection	IP20

## Lamp Characteristics

Lamp Type	LED
Light Source	SMD
Luminous Flux	7200lm   10000lm
Efficacy	100 lm/W
Color Temperature	3000K   4000K   6500K
Color Rendering Index	>80 Ra
Beam Angle	120°

## Electrical Information


Total Power	72W   100W
Voltage	220V AC
Control Gear	On-Off

## Product Code



Brand (BR-)	Product (PRO)	Mounting (MO)	Dimension (DM)	Body Color (B)	IP Rating (IP)	Lumen (LUM)	CCT (CT)	Beam Angle (BA)	Control (C)
Zarelux (ZL-)	Quade Panel Light (QPL)	Ceiling Recessed (CR)	L 1200mm (12)	White (W)	IP20 (20)	7200lm (720) 10000lm (100)	3000K (30) 4000K (40) 6500K (65)	120deg (12)	On-Off (O)



# Quade Panel Light (300x300mm CM)

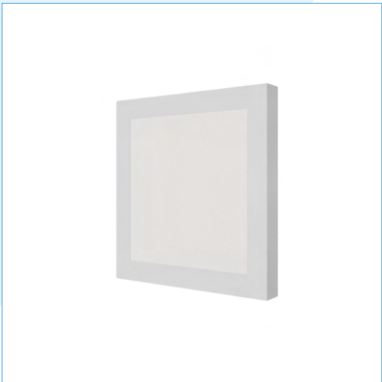

Transform your spaces with our sleek and energy-efficient Panel LED Light. Designed for modern interiors, this thin panel delivers uniform, glare-free illumination, making it perfect for offices, homes, and commercial environments.

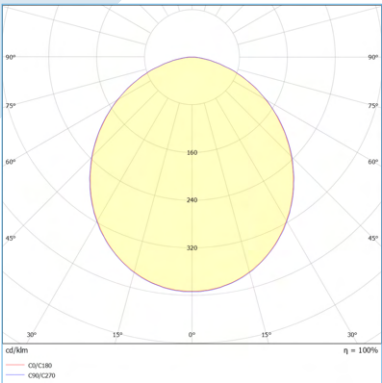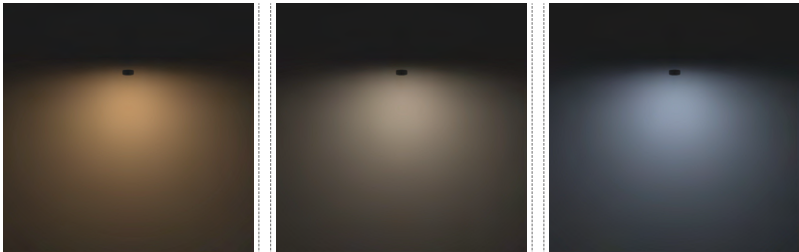

## General Information

Shape	Square
Mounting	Ceiling Mounted
Lighting Application	General Indoor, Living Rooms, Offices
Dimension	L 300m W 300mm H 30mm
Housing Material	Aluminum + Iron
Housing Color	White
Ingress Protection	IP20

## Lamp Characteristics

Lamp Type	LED
Light Source	SMD
Luminous Flux	1600lm
Efficacy	100 lm/W
Color Temperature	3000K   4000K   6500K
Color Rendering Index	>80 Ra
Beam Angle	120°

## Electrical Information

Total Power	16W
Voltage	220V AC
Control Gear	On-Off



## Product Code

Brand (BR-)	Product (PRO)	Mounting (MO)	Dimension (DM)	Body Color (B)	IP Rating (IP)	Lumen (LUM)	CCT (CT)	Beam Angle (BA)	Control (C)
Zarelux (ZL-)	Quade Panel Light (QPL)	Ceiling Mounted (CM)	L 300mm (30)	White (W)	IP20 (20)	1600lm (160)	3000K (30) 4000K (40) 6500K (65)	120deg (12)	On-Off (O)

# Quade Panel Light (600x300mm CM)



Transform your spaces with our sleek and energy-efficient Panel LED Light. Designed for modern interiors, this thin panel delivers uniform, glare-free illumination, making it perfect for offices, homes, and commercial environments.

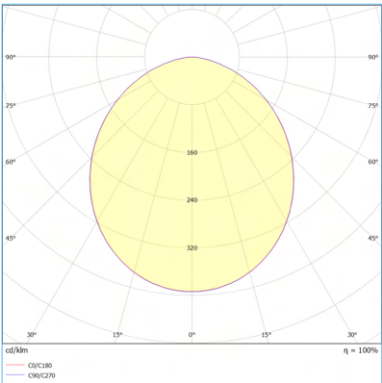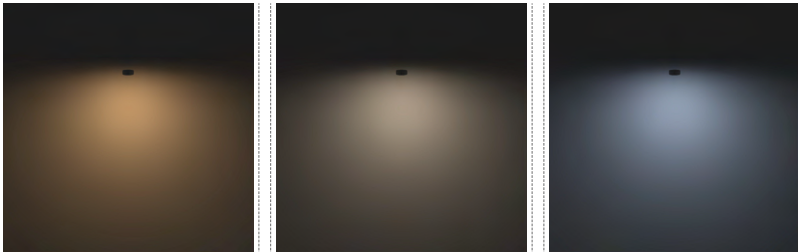

## General Information

Shape	Rectangular
Mounting	Ceiling Mounted
Lighting Application	General Indoor, Living Rooms, Offices
Dimension	L 600mm W 300mm H 30mm
Housing Material	Aluminum + Iron
Housing Color	White
Ingress Protection	IP20

## Lamp Characteristics

Lamp Type	LED
Light Source	SMD
Luminous Flux	2800lm
Efficacy	100 lm/W
Color Temperature	3000K   4000K   6500K
Color Rendering Index	>80 Ra
Beam Angle	120°

## Electrical Information

Total Power	28W
Voltage	220V AC
Control Gear	On-Off

## Product Code



Brand (BR-)	Product (PRO)	Mounting (MO)	Dimension (DM)	Body Color (B)	IP Rating (IP)	Lumen (LUM)	CCT (CT)	Beam Angle (BA)	Control (C)
Zarelux (ZL-)	Quade Panel Light (QPL)	Ceiling Mounted (CM)	L 600mm (60)	White (W)	IP20 (20)	2800lm (280)	3000K (30) 4000K (40) 6500K (65)	120deg (12)	On-Off (O)



# Quade Panel Light (600x600mm CM)



Transform your spaces with our sleek and energy-efficient Panel LED Light. Designed for modern interiors, this thin panel delivers uniform, glare-free illumination, making it perfect for offices, homes, and commercial environments.

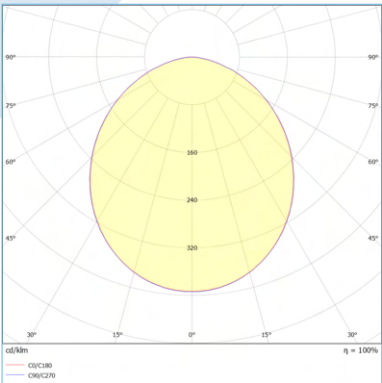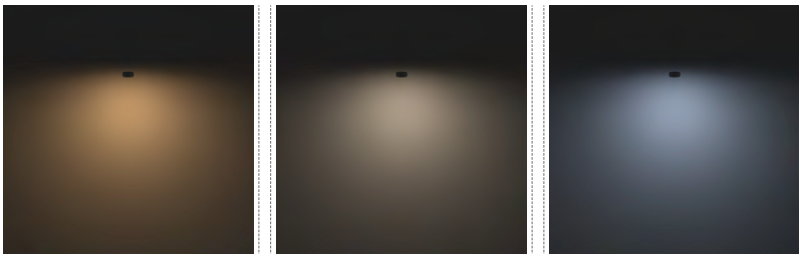

## General Information

Shape	Square
Mounting	Ceiling Mounted
Lighting Application	General Indoor, Living Rooms, Offices
Dimension	L 600m W 600mm H 30mm
Housing Material	Aluminum + Iron
Housing Color	White
Ingress Protection	IP20

## Lamp Characteristics

Lamp Type	LED
Light Source	SMD
Luminous Flux	3600lm   5000lm   6000lm
Efficacy	100 lm/W
Color Temperature	3000K   4000K   6500K
Color Rendering Index	>80 Ra
Beam Angle	120°

## Electrical Information

Total Power	36W   50W   60W
Voltage	220V AC
Control Gear	On-Off



## Product Code

Brand (BR-)	Product (PRO)	Mounting (MO)	Dimension (DM)	Body Color (B)	IP Rating (IP)	Lumen (LUM)	CCT (CT)	Beam Angle (BA)	Control (C)
Zarelux (ZL-)	Quade Panel Light (QPL)	Ceiling Mounted (CM)	L 600mm (60)	White (W)	IP20 (20)	3600lm (360) 5000lm (500) 6000lm (600)	3000K (30) 4000K (40) 6500K (65)	120deg (12)	On-Off (O)

# Quade Panel Light (1200x300mm CM)



Transform your spaces with our sleek and energy-efficient Panel LED Light. Designed for modern interiors, this thin panel delivers uniform, glare-free illumination, making it perfect for offices, homes, and commercial environments.

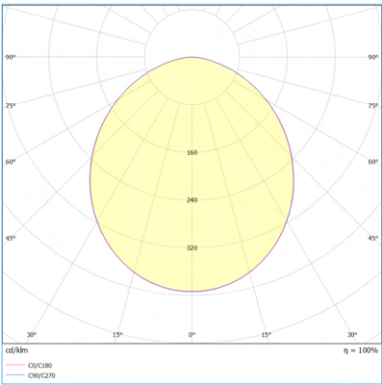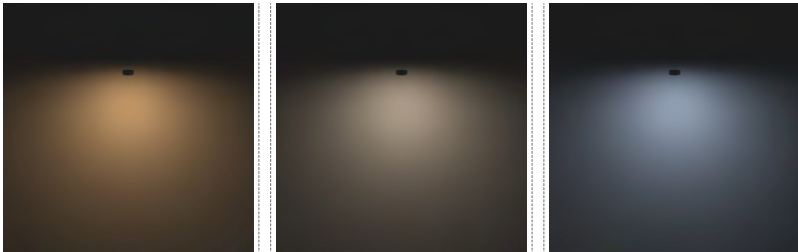

## General Information

Shape	Rectangular
Mounting	Ceiling Mounted
Lighting Application	General Indoor, Living Rooms, Offices
Dimension	L 1200m W 300mm H 30mm
Housing Material	Aluminum + Iron
Housing Color	White
Ingress Protection	IP20

## Lamp Characteristics

Lamp Type	LED
Light Source	SMD
Luminous Flux	3600lm   5000lm
Efficacy	100 lm/W
Color Temperature	3000K   4000K   6500K
Color Rendering Index	>80 Ra
Beam Angle	120°

## Electrical Information

Total Power	36W   50W
Voltage	220V AC
Control Gear	On-Off

## Product Code



Brand (BR-)	Product (PRO)	Mounting (MO)	Dimension (DM)	Body Color (B)	IP Rating (IP)	Lumen (LUM)	CCT (CT)	Beam Angle (BA)	Control (C)
Zarelux (ZL-)	Quade Panel Light (QPL)	Ceiling Mounted (CM)	L 1200mm (12)	White (W)	IP20 (20)	3600lm (360) 5000lm (500)	3000K (30) 4000K (40) 6500K (65)	120deg (12)	On-Off (O)



# Quade Panel Light (1200x600mm CM)



Transform your spaces with our sleek and energy-efficient Panel LED Light. Designed for modern interiors, this thin panel delivers uniform, glare-free illumination, making it perfect for offices, homes, and commercial environments.

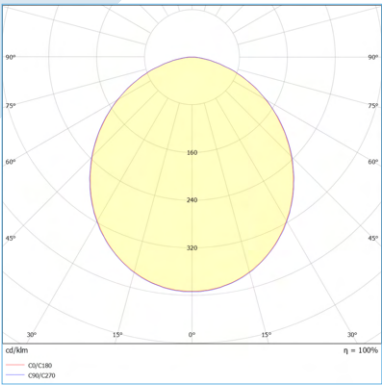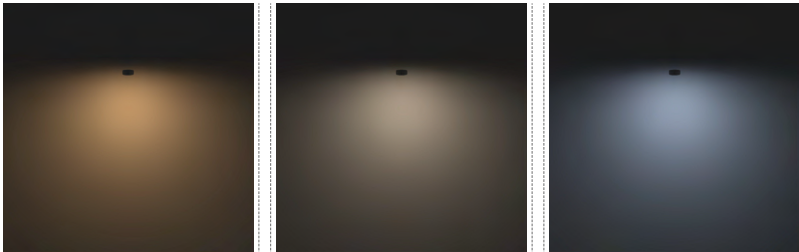

## General Information

Shape	Rectangular
Mounting	Ceiling Mounted
Lighting Application	General Indoor, Living Rooms, Offices
Dimension	L 1200m W 600mm H 30mm
Housing Material	Aluminum + Iron
Housing Color	White
Ingress Protection	IP20

## Lamp Characteristics

Lamp Type	LED
Light Source	SMD
Luminous Flux	5000lm
Efficacy	100 lm/W
Color Temperature	3000K   4000K   6500K
Color Rendering Index	>80 Ra
Beam Angle	120°

## Electrical Information

Total Power	50W
Voltage	220V AC
Control Gear	On-Off

## Product Code

Brand (BR-)	Product (PRO)	Mounting (MO)	Dimension (DM)	Body Color (B)	IP Rating (IP)	Lumen (LUM)	CCT (CT)	Beam Angle (BA)	Control (C)
Zarelux (ZL-)	Quade Panel Light (QPL)	Ceiling Mounted (CM)	L 1200mm (12)	White (W)	IP20 (20)	5000lm (500)	3000K (30) 4000K (40) 6500K (65)	120deg (12)	On-Off (O)